

LOOKING FOR **CRYSTAL CLEAR** PICTURE AND SOUND?



M10-HT-PRO



• **Premium Filtration**

Improves Picture and Sound. Provides clean power by filtering out noise common to household power.



• **AVM (Automatic Voltage Monitoring)**

Protects against prolonged over voltages by disconnecting power to equipment.



• **Coax/Sat Protection**

Protects equipment from electrical surges that travel over Cable, Satellite, and Antenna lines.



• **12 Volt Trigger**

Allows source equipment to activate or deactivate the delayed outlets on the M10-HT-PRO.



• **Telephone Line Protection**

Protects equipment from electrical surges that travel over Telephone lines.



• **3 Isolated Outlet Banks**

Isolating outlet banks from one another prevents noise contamination between components.



• **10 Outlets**

4 digital-ultrasonic noise filtered outlets, 3 Linear Filtration outlets, 3 Linear Filtration outlets with sequenced activation.



• **Surge Protection**

Exclusive Protect or Disconnect™ circuitry. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment



• **Hi Def Ready**

Hi-Def Designed to work with your High Definition system.

M10-HT-PRO

HOME THEATER POWER MANAGEMENT

1 Improves Picture and Sound Quality

The M10-HT-PRO's Power Cleaning and Linear Filtration

eliminates common symptoms of contaminated power (including loss of detail, pops, hisses, hums and visual artifacts) and allows your A/V equipment to perform up to its full capability.

2 Monitors Incoming Line Voltage


The M10-HT-PRO senses sustained voltages that are high enough to cause damage to your components, and shuts the power down before damage can occur.

3 Reduces Cross-Contamination Between Components

The M10-HT-PRO is designed to provide noise isolation between 3 isolated outlet banks so that any noise created by an A/V component can not contaminate the power going to equipment plugged into another outlet bank.



M10-HT-PRO FEATURES

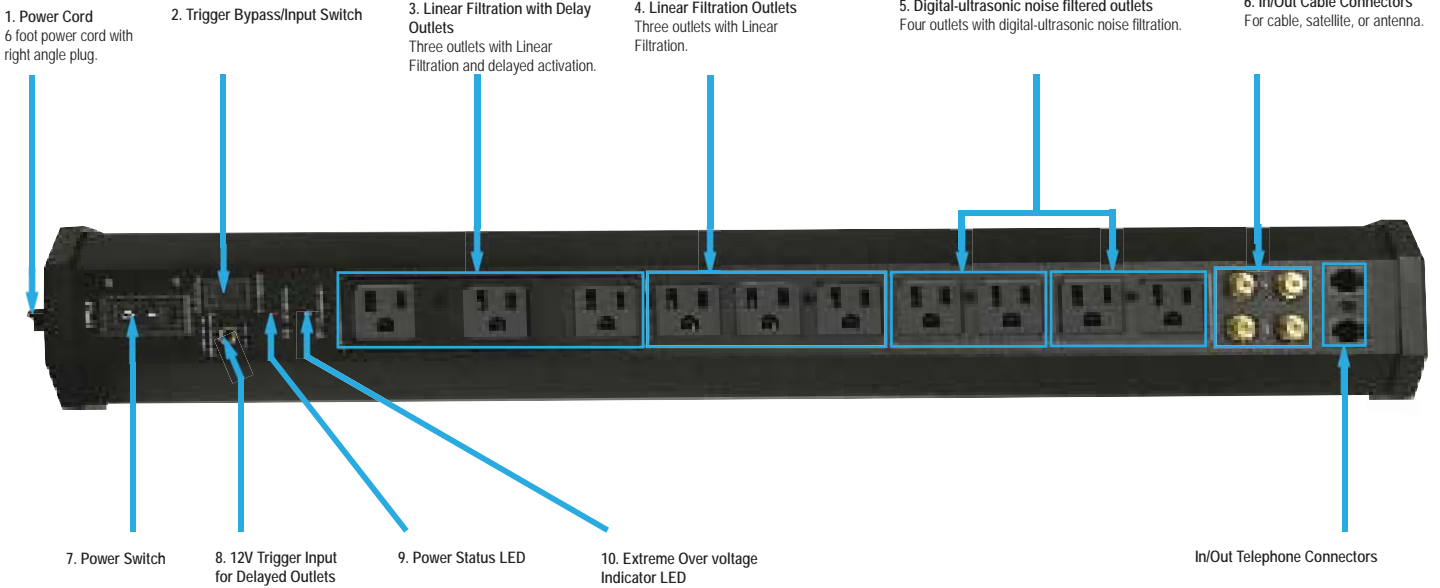

M10-HT-PRO SPECIFICATIONS

General		Telco Protection	
Dimensions:	23.5 in. L x 3.75 in. W x 3.5 in H	Clamping Level:	600V
Weight:	5 lbs.	Capacitance:	30pf (approx.)
AC Power		Suppression Modes:	Metallic
Thermal Fusing:	Yes	Wires Protected:	2 wire, 1 pair (3,4)
Line Voltage:	120VAC, 50/60Hz	Connectors:	RJ-11
Initial Clamping Level:	200V Peak, 141V RMS	Universal Coaxial Protection	
Overvoltage shutoff:	137V	HD Ready:	Yes
UL1449 Suppression Rating:	330V	Shielded:	Yes
Protection Modes:	L-N	Clamping Level:	90V
Maximum Current Rating:	15 A	Frequency Range:	5MHz - 2200 GHz
Energy Dissipation:	575 Joules	Insertion Loss:	< 0.1 dB
Peak Impulse Current:	21,000 Amps	Connections:	Female "F"
EMI/RFI Noise Filtration:	53 dB (100kHz - 1 MHz)	Bi-Directional:	Yes
Response Time:	< 1n	Design and specifications subject to change without notice due to product improvement.	
DC Trigger Input			
Jacks:	3.5mm mono mini-plug		
Voltage and Polarity:	3 - 24V DC, bidirectional		
Current Requirement:	4.6 mA @3V, 58 mA @24V		

UPC'S, QUANTITIES, WEIGHTS & MEASUREMENTS FOR ORDERING & SHIPPING

MODEL M10-HT-PRO		UNIT CARTON			MASTER CARTON			
Dimensions	Weight	Dimensions	Weight	UPC	Qty	Dimensions	Weight	UPC
23.5" x 3.75" x 3.5"	5 lbs	28.5" x 8.5" x 5"	6 Lbs	0 50616 00828 0	4	31.25" x 10.25" x 16.5"	28 Lbs	5 00 50616 00828 5



1690 Corporate Circle, Petaluma, CA. 94954 800-472-5555 or 707-283-5900 Fax 707-283-5901 www.panamax.com

© 2007 Panamax, Inc. Panamax, MAX, and the Panamax logo are registered US trademarks of Panamax

L581 REVA 5/07