


MAX[®] LIGHT 4200 LIGHT & AC PROTECTOR FOR A/V SYSTEMS

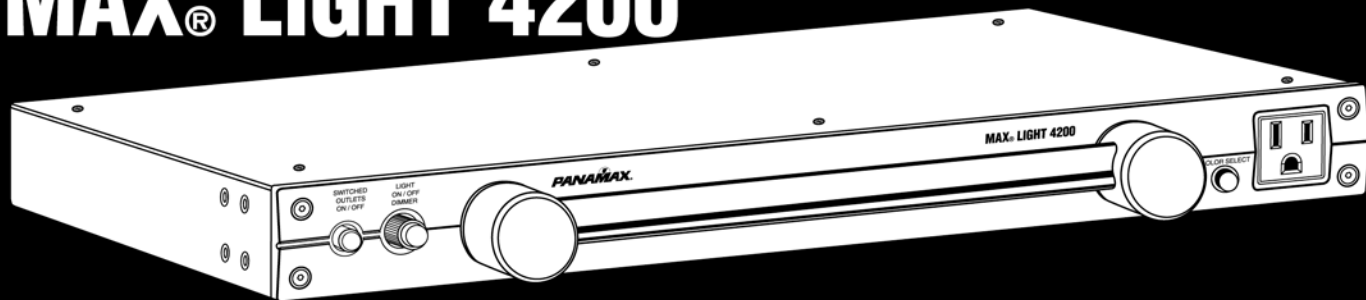

MAX[®] LIGHT 4200 FEATURES (ML4200)



Switched Outlets Pushbutton - Controls the ON/OFF power for the eight rear outlets.

Light On/Off/Dimmer Control - Controls the brightness of the light rod. Rotate the knob clockwise for maximum lighting and counter-clockwise to dim or turn-off the light.

Light Rod - High intensity, LED light illuminates your electronic equipment. Rotating the light rod up or down with control the direction of the light. LED lighting is safe, long lasting and will not generate heat during use.

Color Select Pushbutton - Press to cycle through the available light rod colors. Choose between white, aqua, green or blue.

Convenience Outlet - An Always-On outlet provides power for temporary connection to equipment.

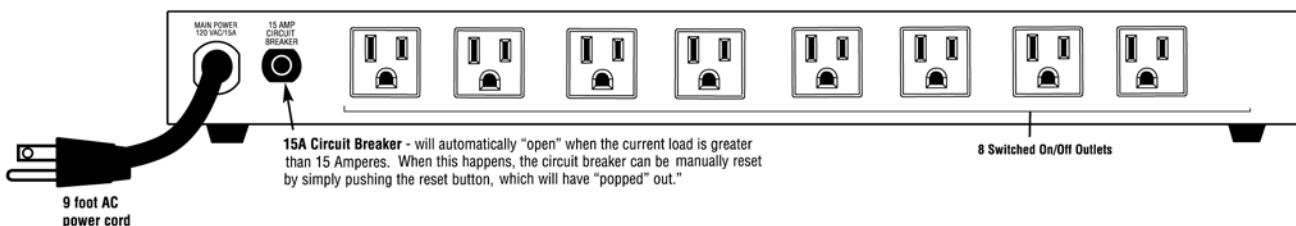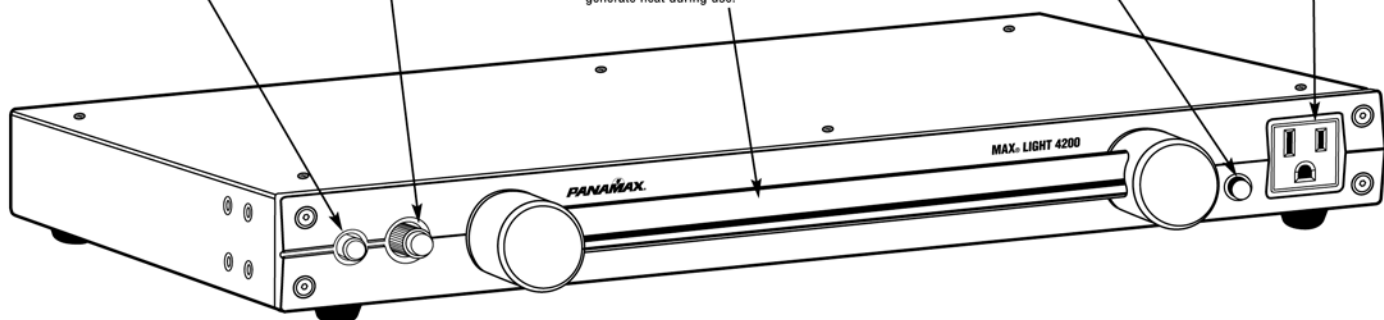

15A Circuit Breaker - will automatically "open" when the current load is greater than 15 Amperes. When this happens, the circuit breaker can be manually reset by simply pushing the reset button, which will have "popped" out."

8 Switched On/Off Outlets

9 foot AC power cord

- Multi-colored LED light, may be directed up or down
- 4 light color selections, white, aqua, green and blue
- Virtually unbreakable acrylic light rod
- Will never burn out, emits no heat
- Provides light for up to 3 feet of shelf/rack space

MAX[®] LIGHT 4200 PRODUCT SPECIFICATIONS

AC & Surge Protection

Line Voltage.....	120 VAC, 50/60 Hz
Maximum Current Rating.....	15A (1800 Watts)
Protect or Disconnect™ Circuitry.....	Yes
Thermal Fusing.....	Yes
UL 1449 Surge Protection Rating.....	330V
Protection Modes.....	L-N, L-G, N-G
Single Pulse Energy Dissipation.....	1350 Joules
Peak Impulse Current.....	52,000A
Initial Clamping Level.....	141V RMS/ 200V Peak
Response Time.....	<1ns
EMI/RFI Noise Filtration.....	50dB (99.7%)
LED Life Expectancy.....	100,000 Hours

**CONNECTED EQUIPMENT
\$5,000,000
PROTECTION POLICY***

*See actual policy for claims procedures and details.

PANAMAX[®]

THE POWER SPECIALIST SINCE 1975