

MIW-XT

MAX® IN WALL™ POWER MANAGEMENT EXTENDER SYSTEM

MIW-XT extends noise free, safe power from Panamax / Furman Power Management components to remote panel displays, ceiling mounted video projectors and powered sub-woofers. Discreetly hides behind electronic equipment for a neat, clean, code compliant and professional installation.

- Ultra-thin profile can allow equipment to hang less than one inch from the wall.
- EMI/RFI noise filtration built into outlet receptacle.
- Power and signal lines are *hidden in the wall behind panel displays* for a clean, tidy and professional installation.
- Extend Connected Equipment Policy to remote equipment when used with Panamax/Furman Power Management components.
- Accommodates optional MIW Signal Line Modules (sold separately, contact Panamax or Furman).
- CSA Certified for code compliant installations.
- 3 Year Product Warranty

Installation requires use of an **outlet box or boxes that are NOT provided with the product**. Product has been tested thoroughly to be compatible with the following outlet boxes:

	NEW WORK	OLD WORK
Plastic:	Carlton SC200DV	Carlton B114R
Metal:	Raco 8355	Raco 508 (hardware removed)


MODEL: MIW-XT

Elegant, nickel plated steel faceplates with brushed metal finish.




Signal bay on both INLET and OUTLET provides a wide variety of optional installation solutions by using:


Decora® Adapters

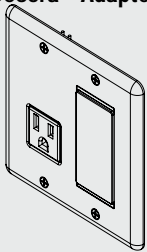


Pass-Through Inserts

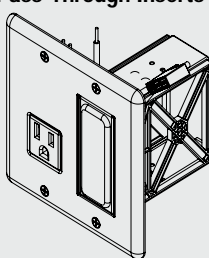

Keystone 2-Port Adapter

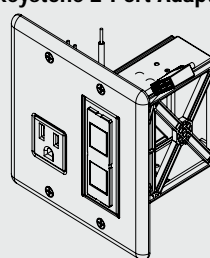

MIW Signal Line Modules*

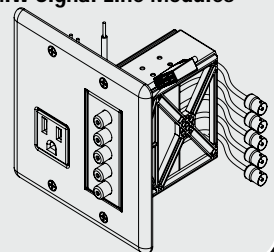

*MIW modules sold separately



By Panamax-Furman
PF Power

L611-PFP REV. D

Pass-through inserts feature adjustable depth settings and can accommodate grommett (Shown above) or Keystone 2-port adapter.

Clip secures plug to inlet faceplate.

MIW-XT inlet faceplate

6 ft. IEC / NEMA Inlet Faceplate power cord

Plug clip

Flat plug adapter cord


Keystone 2-Port Adapters

MIW-XT outlet facplate


6 Wire nuts

Decora Adapters can accommodate 6-port insert (insert not included)

Rear view of faceplate assembly.



Ultra thin profile of flat plug can allow equipment to hang less than one inch from the wall.

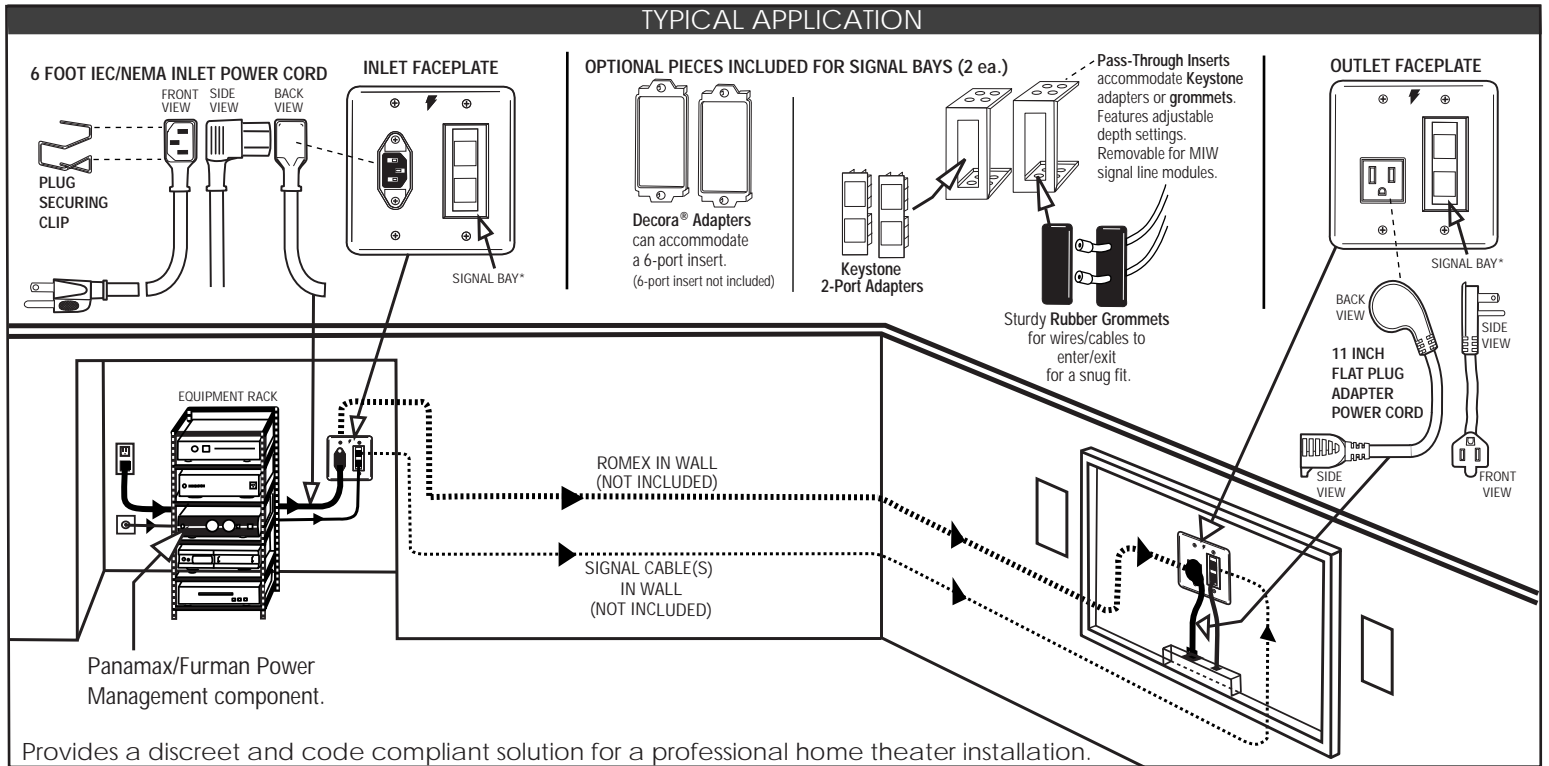

*Signal Bay can also accommodate MIW Signal Line Modules (sold separately).

AC CIRCUIT

AC Outlets, Total.....1
Line Voltage.....120V, 60Hz
Total Current Capacity.....15A

IEC POWER INLET CORD

Length.....6 ft.
Connectors.....IEC 320-C13 and NEMA 5-15

FLAT PLUG AC POWER CORD

Length.....11 inches
Connectors.....NEMA 5-15P and NEMA 5-15R

POWER INLET FACEPLATE

AC Connector.....IEC 320 C14
Signal Line Protection not included, modules sold separately*

POWER OUTLET FACEPLATE

AC Connector.....NEMA 5-15
Noise Filtration.....Level 1
Signal Line Protection not included, modules sold separately*

GENERAL

Product Warranty.....3 years

*Contact Panamax or Furman for signal line protection modules.

Design and specifications subject to change without notice due to product improvement.

SHIPPING DIMENSIONS, WEIGHTS AND UPC CODES

Single Pack Dimensions.....7.25"W x 5"D x 7"H
Single Pack Weight.....4 lbs.
Single Unit UPC.....0 50616 00848 8
Master Pack Dimensions.....15"W x 10.5" D x 7.5" H
Master Pack Qty.....4 Kits
Master Pack Weight.....17 lbs.
Master Pack UPC.....5 00 50616 00848 3